

Hands-on

Routing configuration / commands glossary

Cisco commands

1. Enable IPv6 on an interface

```
interface xxxxx
  ipv6 enable
```

2. Configure an address

```
interface xxxxx
  ipv6 address X:X:X:X::X/<0-128> (general address)
  ipv6 address X:X:X:X::X (link-local address)
  ipv6 address autoconfig (auto-configuration)
```

Example (LAN interface)

```
interface Ethernet0/0
  ip address 192.168.1.254 255.255.255.0
  ipv6 address 2001:db8:123:1::2/64
```

Configure a tunnel

Configure an IPv6 in IPv4 tunnel

```
interface tunnel x
  tunnel source interface
  tunnel destination X.X.X.X
  ipv6 address X:X:X:X::X/<0-128>
  tunnel mode ipv6ip (for direct tunneling)
  tunnel mode gre ip (for gre encapsulation)
```

Configure an IPv6 in IPv6 tunnel

```
interface tunnel x
  tunnel source interface
  tunnel destination X.X.X.X
  ipv6 address X:X:X:X::X/<0-128>
  tunnel mode ipv6 (for direct tunneling)
  tunnel mode gre ipv6 (for gre encapsulation)
```

Enable IPv6 routing

```
ipv6 unicast-routing
```

Configure static routes


```
ipv6 route prefix/prefixlen next_hop
ipv6 route ::/0 2001:db8:10a:1001::1
```



Routing (OSPFv3)

```

interface Ethernet0/0
  ipv6 address 2001:db8:1:1::1/64
  ipv6 ospf 1 area 0
!
interface Ethernet0/1
  ipv6 address 2001:db8:1:2::2/64
  ipv6 ospf 1 area 1
!
ipv6 router ospf 1
router-id 2.2.2.2
  
```

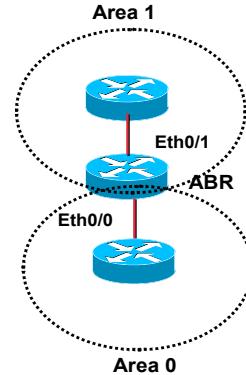

Routing (BGP)

```

no bgp4 default unicast
bgp router-id a.b.d.f
router bgp xxxx
  neighbor X:X:X:X::X remote-as ...
  neighbor X:X:X:X::X ...
  address-family ipv6
  neighbor X:X:X:X::X activate
  neighbor X:X:X:X::X ...
  network 2001:db8::/32
  no synchronization
  exit address-family
  
```

Routing policy filtering

```

ipv6 prefix-list bgp-in-6net seq 5 deny ::/0
  Means filter ::/0 exactly
ipv6 prefix-list bgp-in-6net seq 10 deny 3FFE:300::/24 le 28
ipv6 prefix-list bgp-in-6net seq 15 deny 2001:db8::/35 le 41
ipv6 prefix-list bgp-in-6net seq 20 permit 2002::/16
ipv6 prefix-list bgp-in-6net seq 25 permit 3FFE::/17 ge 24 le 24
  ipv6 prefix-list bgp-in-6net seq 30 permit 3FFE:8000::/17 ge 28 le 28
  Means every prefix matching 3FFE:8000::/17 with length 28
  ipv6 prefix-list bgp-in-6net seq 35 permit 3FFE:4000::/18 ge 32 le 32
  ipv6 prefix-list bgp-in-6net seq 40 permit 2001::/16 ge 32 le 35
  Means every 2001::/16 derived prefix, with length between 32 and 35
  
```

Access Control Lists

```

ipv6 access-list vty-ipv6
  permit tcp 2001:db8:0:401::/64 any eq telnet
  deny ipv6 any any log-input
  
```



Applying an ACL to an interface

```
ipv6 traffic-filter <acl_name> in | out
```

Restricting access to the router

```
ipv6 access-class <acl_name> in | out
```

Applying an ACL to filter debug traffic

```
debug ipv6 packet [access-list <acl_name>] [detail]
```

Show commands

```
show bgp
show bgp ipv6 unicast/multicast/all summary
show bgp ipv6 neigh <addr> routes
show bgp ipv6 neigh <addr> advertised-routes
show bgp ipv6 neigh <addr> received-routes
show ipv6 route
show ipv6 interface
show ipv6 neighbors
```



Juniper commands

Interface configuration

```
interfaces {
    name of interface {
        unit x {
            family inet {
                address X.X.X.X/prefixlength;
            }
            family iso {
                address Y.Y.Y.Y.Y.Y;
            }
            family inet6 {
                address Z.Z.Z.Z::z/prefixlength;
            }
        }
    }
}
```

Router advertisements (stateless autoconfiguration)

```
protocols {
    router advertisement {
        interface interface name {
            prefix IPv6_prefix::/prefixlength;
        }
    }
}
```

Configure tunnel (with Tunnel PIC)

```
interface {
    ip-x/x/x {
        tunnel {
            source ipv4_source_address;
            destination ipv4_destination_address;
        }
        family inet6 {
            address ipv6_address_in_tunnel/prefixlength;
            gr-x/x/y/z {
                unit 0 {...}
            }
        }
    }
}
```

Static routes

```
Routing options {
    rib inet6.0 {    -> Means IPv6 unicast routing table
        static {
            route IPv6_prefix next-hop IPv6_address;
        }
    }
    Routing options {
        rib inet6.0 {
            static {
```



```
route IPv6_prefix discard;    -> Useful to originate a
network
}
```

Routing (OSPFv3)

```
protocols {
    ospf3 {
        preference 20;
        area 0.0.0.0 {
            interface ge-0/3/0.808 {
                metric 100;
            }
            interface lo0.0 {
                passive;
            }}}}
```

Routing (BGP)

```
protocols {
    bgp {
        local-as local_AS_number;
        group EBGP_peers {
            type external;
            family inet6 {
                (any | multicast | unicast) }
                neighbor neighbor_IPv6_address;
                peer-as distant_AS_number;
                import in-PS;
                export out-PS; }}
```

Policy routing

```
policy statement in PS {
    term from_outside.Accept {
        from {
            route-filter 2002::/16 exact;
            route-filter 3FFE::/17 prefix-length-range /24-/24;
            route-filter 3FFE:8000::/17 prefix-length-range /28-/28;
            route-filter 3FFE:4000::/18 prefix-length-range /32-/32;
            route-filter 2000::/3 prefix-length-range /16-/16;
            route-filter 2001::/16 prefix-length-range /29-/35; }
        then {
            accept; }
        then reject; }}
```

Show commands

```
show bgp summary
show route advert bgp <addr>
show route rece bgp <addr>
show route table inet6.0 (terse)
```

IPv6DISSemination and Exploitation



```
show interfaces  
show ipv6 neighbors
```

