

# Campus IPv6 connection – Campus IPv6 deployment

Campus Address allocation,  
Topology Issues

János Mohácsi

NIIF/HUNGARNET



6DISS IPv6 workshop 2005 South Africa

IPv6DISSemination and Exploitation

## Copy ...Rights

- *This slide set is the ownership of the 6DISS project via its partners*
- *The Powerpoint version of this material may be reused and modified only with written authorization*
- *Using part of this material must mention 6DISS courtesy*
- *PDF files are available from [www.6diss.org](http://www.6diss.org)*



6DISS IPv6 workshop 2005 South Africa

IPv6DISSemination and Exploitation

## Contributions

- Main authors
  - János Mohácsi, NIIF/HUNGARNET - Hungary
- Contributors
  - Jérôme Durand, Renater, France
  - Tim Chown, University of Southampton, UK



## Various Campus transition approaches

- Tunneling (“connecting IPv6 clouds”)
  - IPv6 packet is data payload of IPv4 packet/ or MPLS frames
- Translation methods (“IPv4<->IPv6 services”)
  - Layer 3: Rewriting IP header information (NAT-PT)
  - Layer 4: Rewriting TCP headers
  - Layer 7: Application layer gateways (ALGs)
- Dual Stack
  - Servers/clients speaking both protocols
  - Application/service can select either protocol to use



## Benefits of dual-stack deployment

- By deploying dual-stack, you can test IPv6-only devices/services without disrupting IPv4 connectivity
- Dual stack IPv6 + IPv4 NAT: legacy IPv4 applications (email, www) can be used next to new IPv6 applications (p2p, home networking, ...)
  - IPv6 offers the next generation of applications



## Campus deployment plan / 1

- Obtain global IPv6 address space from your ISP
  - NRENS usually has a /32 prefix from RIPE NCC/RIRs
  - A university will get a /48 prefix from NRENS
- Obtain external connectivity
  - You can do dual-stack connectivity
  - Many universities will use tunnel to to get IPv6 service
    - in this case be sure that nobody can abuse your tunnel - use filtering



## Campus deployment plan / 2

- Internal deployment
  - Determine an IPv6 firewall/security policy
  - Develop an IPv6 address plan for your site
  - Determine address management policy (RA/DHCPv6?)
  - Migrate to dual-stack infrastructure on the wire
    - Network links become IPv6 enabled
  - Enable IPv6 services and applications
    - Starting with DNS
  - Enable IPv6 on host systems (Linux, WinXP, ...)
  - Enable management and monitoring tools



## Campus Addressing


- Most sites will receive /48 assignments:

Network address (48 bits)	16bits	EUI host address (64 bits)
---------------------------	--------	----------------------------

- 16 bits left for subnetting - what to do with them?




## Campus Addressing

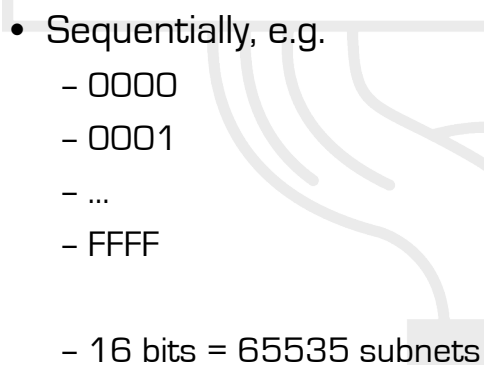- Sequentially, e.g.
    - 0000
    - 0001
    - ...
    - FFFF
  - 16 bits = 65535 subnets
- 



## Campus Addressing

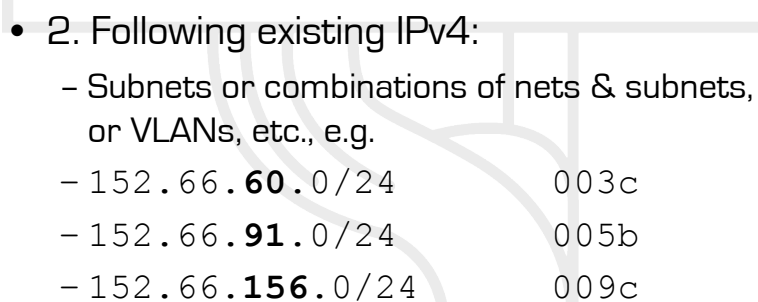- 2. Following existing IPv4:
    - Subnets or combinations of nets & subnets, or VLANs, etc., e.g.
    - 152.66.**60**.0/24      003c
    - 152.66.**91**.0/24      005b
    - 152.66.**156**.0/24      009c
- 



## Campus Addressing

- Topological/aggregating
- reflecting wiring plants, supernets, large broadcast domains, etc.
  - Main library = 0010/60
    - Floor in library = 001a/64
  - Computing center = 0200/56
    - Student servers = 02c0/64
  - Medical school = c000/52
  - and so on. . .



## New Things to Think About

- You can use “all 0s” and “all 1s”! (0000, ffff)
- You’re not limited to 254 hosts per subnet!
  - Switch-rich LANs allow for larger broadcast domains (with tiny collision domains), perhaps thousands of hosts/LAN...
- No “secondary subnets” (though >1 address/interface)
- No tiny subnets either (no /30, /31, /32)—plan for what you need for backbone blocks, loopbacks, etc.
- You should use /64 per links!



## New Things to Think About

- Every /64 subnet has far more than enough addresses to contain all of the computers on the planet, and with a /48 you have 65536 of those subnets - use this power wisely!
- With so many subnets your IGP may end up carrying thousands of routes - consider internal topology and aggregation to avoid future problems.



## New Things to Think About

- Renumbering will likely be a fact of life. Although v6 does make it easier, it still isn't pretty. . .
  - Avoid using numeric addresses at all costs
  - Avoid hard-configured addresses on hosts except for servers (this is very important for DNS servers) – use the feature that you can assign more than one IPv6 address to an interface (IPv6 alias address for servers)
  - Anticipate that changing ISPs will mean renumbering




# Topology Issues

V6 in a production network




# Layer-2 Campus -1 Switch

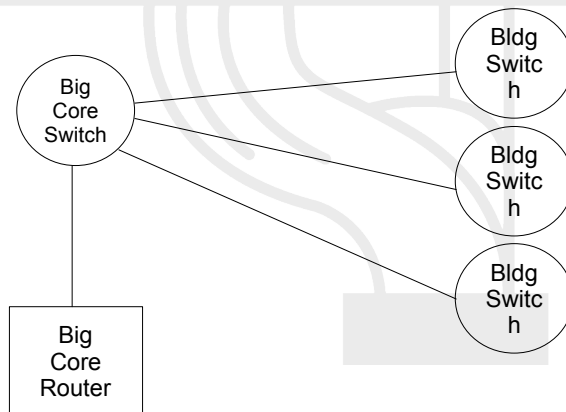




## Layer-2 Campus - 1 Switch

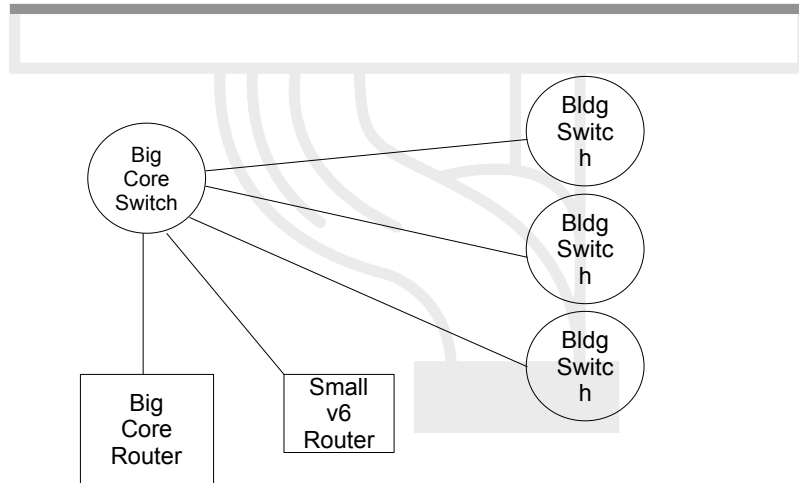

6DISS IPv6 workshop 2005 South Africa

IPv6DISSEmination and Exploitation


## Layer-2 Campus - Redundant Switches

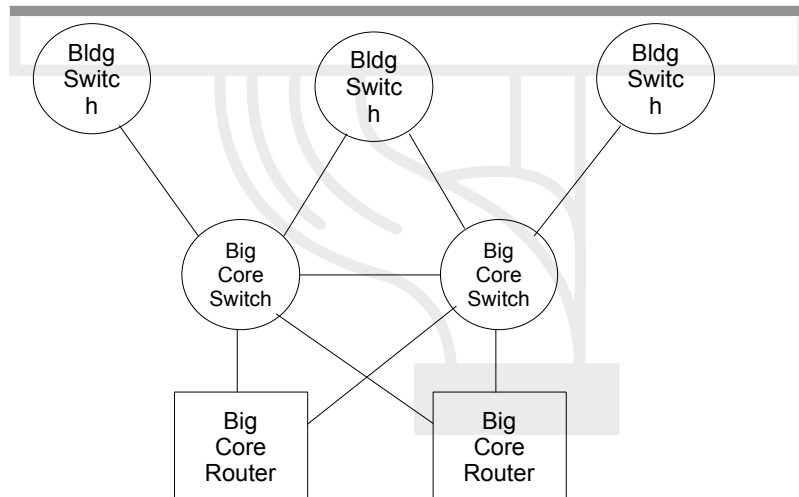

6DISS IPv6 workshop 2005 South Africa

IPv6DISSEmination and Exploitation


## Layer-2 Campus Redundant Switches

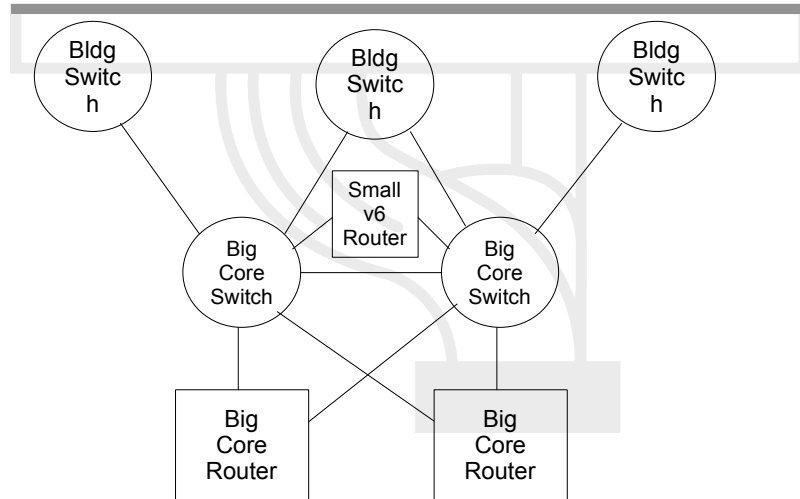

6DISS IPv6 workshop 2005 South Africa

IPv6DISSEmination and Exploitation


## Layer-3 Campus

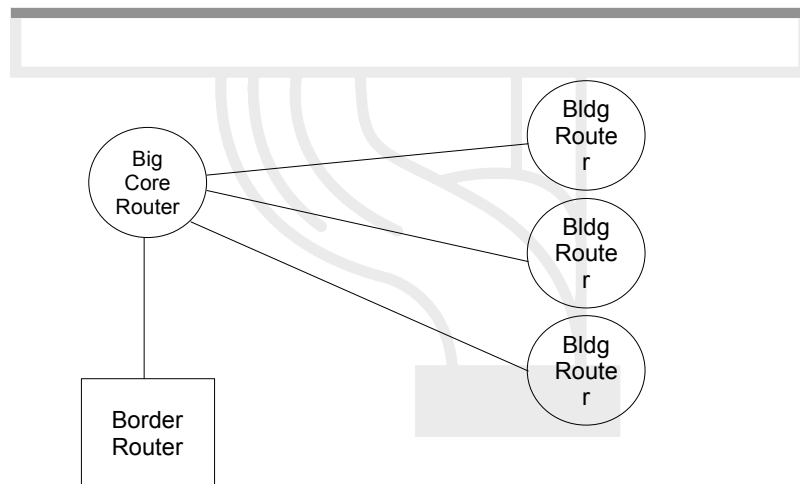


6DISS IPv6 workshop 2005 South Africa

IPv6DISSEmination and Exploitation

# Layer-3 Campus

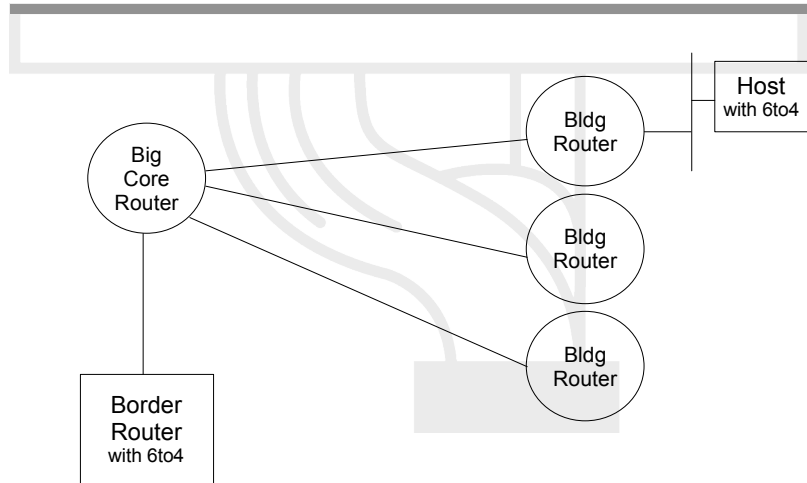

# Edge Router Options

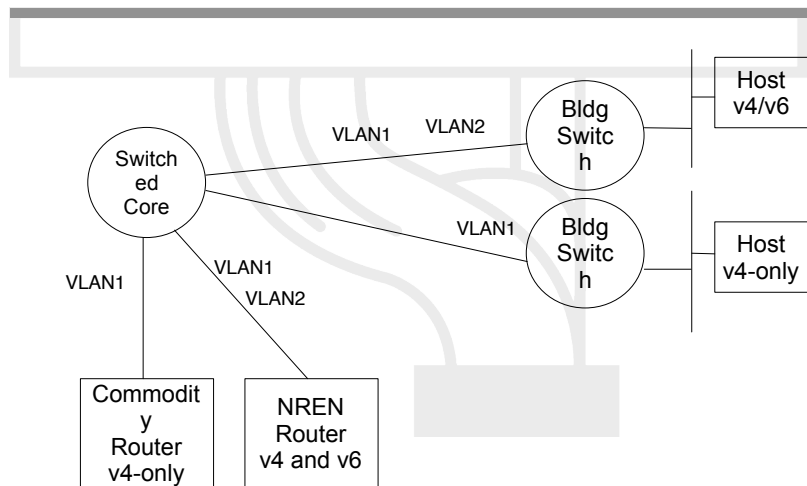

## Routing Protocols

- iBGP and IGP (IS-IS/OSPFv3)
  - IPv6 iBGP sessions in parallel with IPv4
  - You need IPv4 router-id for IPv6 BGP peering
- Static Routing
  - all the obvious scaling problems, but works OK to get started, especially using a trunked v6 VLAN.
- OSPFv3 is might be good
  - It will run in a ships-in-the-night mode relative to OSPFv2 for IPV4 - neither will know about the other.



## Management and monitoring

- Device configuration and monitoring - SNMP
- Statistical monitoring e.g. Cricket/MRTG
- Service monitoring - Nagios
- Intrusion detection (IDS)
- Authentication systems
  - For example, 802.1x + RADIUS for WLAN
- See more later



## How to enable IPv6 services?

- Add v6 testing service for different name first:
  - service.v6.fqdn or service6.fqdn with AAAA + reverse PTR entry.
  - Test it
- Add v6 service under the same name:
  - service.fqdn with A +AAAA and two PTR.



## How to enable IPv6 services if you don't have IPv6 capable server?

- Use proxy (more exactly reverse-proxy) server
  - Apache2 proxy is a very good one
- Use netcat
  - Kind of hack ☺



## Apache2 reverse proxy

- Configuration is very easy:

```
ProxyRequests Off
ProxyPass / http://ipv4address
ProxyPassReverse /
  http://ipv4address
ProxyPreserveHost On
```



## Reverse proxy advantages & disadvantages

- Advantage:
  - Fast implementation, instantly provide web service over IPv6
  - No modifications required in a production web server environment
  - Allow for timely upgrading of systems
  - Scalable mechanism: a central proxy can support many web sites
- Disadvantage:
  - Significant administrative overhead for large scale deployment
  - May break advanced authentication and access control schemes
  - Breaks statistics: all IPv6 requests seem to be coming from the same address (may be fixed with filtering and concatenation of logs)
  - Not a long term solution overall, native IPv6 support is readily available in related applications and should be preferred whenever possible



## DHCP (1)

- IPv6 has stateless address autoconfiguration but DHCPv6 (RFC 3315) is available too
- DHCPv6 can be used both for assigning addresses and providing other information like nameserver, ntpserver etc
- If not using DHCPv6 for addresses, no state is required on server side and only part of the protocol is needed. This is called Stateless DHCPv6 (RFC 3736)
- Some server and client implementations only do Stateless DHCPv6 while others do the full DHCP protocol
- The two main approaches are
  - Stateless address autoconfiguration with stateless DHCPv6 for other information
  - Using DHCPv6 for both addresses and other information to obtain better control of address assignment



## DHCP (2)

- One possible problem for DHCP is that DHCPv4 only provides IPv4 information (addresses for servers etc) while DHCPv6 only provides IPv6 information. Should a dual-stack host run both or only one (which one)?
- Several vendors working on DHCP but only a few implementations available at the moment
  - DHCPv6 <http://dhcpv6.sourceforge.net/>
  - dibbler <http://klub.com.pl/dhcpv6/>
  - NEC, Lucent etc. are working on their own implementations
  - KAME - only stateless
- Cisco routers have a built-in stateless server that provides basic things like nameserver and domain name (also SIP server options in image I checked).
- DHCP can also be used between routers for prefix delegation (RFC 3633). There are several implementations. E.g. Cisco routers can act as both client and server



## Remote access via IPv6

- Use native connectivity –
  - Rather easy if you are operating dial-in pool or you are an ADSL service provider
- Use 6to4 if you have global IPv4 address
  - Good 6to4 relay connectivity is a must
- Use tunnelbroker service – rather suboptimal
- Use OpenVPN

