

## IPv6 Multicast



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## Intro

- Multicast is inherent to the IPv6 protocol
- No broadcasts
  - Multicast used instead
- But some parts need to be configured
  - for building the multicast trees
  - for topology information (routing)



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

# IPv6 multicast

Multicast addressing

MLD & MLDv2

PIM SM/SSM

Interdomain multicast



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## Multicast addressing

### • Multicast addresses format: (RFC 3513)

8 bits		4 bits		4 bits		112 bits	
1111	1111	flags	scope	group ID			
F	F						

- 8 high order bits set to 1 → Addresses derived from FF00::/8 prefix
- **flag** field(4 bits) :
  - ORP'T values
    - T = 0 for permanent addresses (Defined by IANA)
    - T = 1 for transient addresses
    - Bits P and R discussed later
- **scope** field → Makes it possible to limit the scope of the multicasting
  - 0 - Reserved
  - 1 - Node-local
  - 2 - Link-local
  - 3 - Subnet-local
  - 4 - Admin-local
  - 5 - Site-local
  - 8 - Organization-local
  - E - Global (Internet)



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## Multicast addressing

- Scopes must be configured on routers!
- Examples of IANA allocated addresses
  - Flag bits T=P=R=0
    - Flag = 0
  - Group ID 101 → NTP servers
    - **FF01:0:0:0:0:0:101** : All the NTP servers on the sender's host
    - **FF02:0:0:0:0:0:101** : All the NTP servers on the sender's link
    - **FF05:0:0:0:0:0:101** : All the NTP servers on the sender's site
    - **FF0E:0:0:0:0:0:101** : All the NTP servers on the Internet



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSemination and Exploitation

## Reserved multicast addresses: examples (RFC 2375)

- Addresses available only for a given scope
  - **FF02:0:0:0:0:0:1** : All the nodes of the link
  - **FF02:0:0:0:0:0:2** : All the routers of the link
  - **FF05:0:0:0:0:0:2** : All the routers of the site
  - **FF02:0:0:0:0:0:D** : All the PIM routers of the link
  - ...
- Addresses available for all scopes
  - **FF0X:0:0:0:0:0:101** : Network Time Protocol (NTP)
  - **FF0X:0:0:0:0:0:109** : MTP Multicast Transport Protocol
  - ...



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSemination and Exploitation

## IPv6 multicast and Ethernet

- Ethernet is multicast capable (not always implemented)
- Requires 8th bit of MAC address to be set to 1
- For IPv6 : @MAC = 33-33-xx-yy-zz-kk
- xx-yy-zz-kk are 32 lower bits of the IPv6 address
- Example:
  - IPv6@ = **FF3E:40:2001:660:3007:123:1234:5678**
  - MAC@ = **33-33-12-34-56-78**



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSemination and Exploitation

## Solicited node multicast addresses (for NDP)

- Multicast address built from unicast address
- Concatenation of
  - FF02::1:FF00:0/104
  - 24 low order bits of the unicast address
- Nodes build their own IPv6 solicited node multicast address
- Nodes that know the IPv6 address of a host but not its MAC address can use the solicited node multicast address
  - NDP protocol (Neighbor Discovery Protocol)
  - Protocol for DAD management
- Avoids sending MAC broadcasts (FF-FF-FF-FF-FF-FF)
- Example:

**2001:0660:010a:4002:4421:21FF:FE24:87c1**  
**FF02:0000:0000:0000:0000:0001:FF00:0000/104**  
**FF02:0000:0000:0000:0000:0001:FF24:87c1**  
**33-33-FF-24-87-C1 -> MULTICAST MAC ADDRESS**



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSemination and Exploitation

## Multicast addresses derived from unicast prefixes (RFC 3306)

- **Flag : ORPT**

11111111	flag	scop	reserved	Plen	Network prefix	Group ID
8 bits	4	4	8 bits	8	64 bits	32 bits

Flag : ORPT

P=0 → Address not based on the unicast prefix

P=1 → Address based on the unicast prefix

If P=1 → T=1 → FF30::/12 prefix  
(T=1 because not allocated by IANA)

Reserved : 0

Plen: Prefix length

Network prefix

Example: prefix 2001:660::/32 (RENATER)  
address FF3E:20:2001:660:0:0:1234:abcd



## SSM addresses

- Are also RFC3306 addresses
- SSM addresses range: FF3X::/32
- Only addresses in FF3X::/96 should be used now. These are RFC3306 addresses with:
  - Plen = 0
  - Prefix = 0
- Example:
  - FF3x::1234:abcd /96
  - 1234:abcd being the Group ID



# Multicast addresses allocation

- « Manual » choice of multicast address and port
- Dynamic
  - Session Announcement Protocol, (SAP), ID
    - SDR implements SAP (not scalable for a global scope)
  - MADCAP, RFC 2730
    - Multicast Address Dynamic Client Allocation Protocol (too much complex, very few implementations and no deployment)
  - GLOP, RFC 2770
    - Useless as we have RFC 3306
- Multicast addresses derived from unicast prefixes (RFC 3306)
  - Any host can derive a multicast address from the network prefix where it is connected
  - Makes allocation easier
  - How to assign addresses to end user remains a problem



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSemination and Exploitation

## IPv6 multicast

Multicast addressing

MLDv1 & MLDv2

PIM SM/SSM

Interdomain multicast



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSemination and Exploitation

# Multicast Listener Discovery ( MLD )

RFC 2710 (MLD version 1)

RFC 3810 (MLD version 2)



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## MLD


- Interaction protocol between
  - Multicast router on the link-local
  - Multicast hosts on the link-local
- Host can say: « I want to join group *FF0E::1234* and receive the related flow »
- MLD <-> IGMPv2 <-> ASM only
- MLDv2 <-> IGMPv3 <-> SSM + ASM
- MLD messages are sent in ICMPv6 packets




DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

# MLD packet

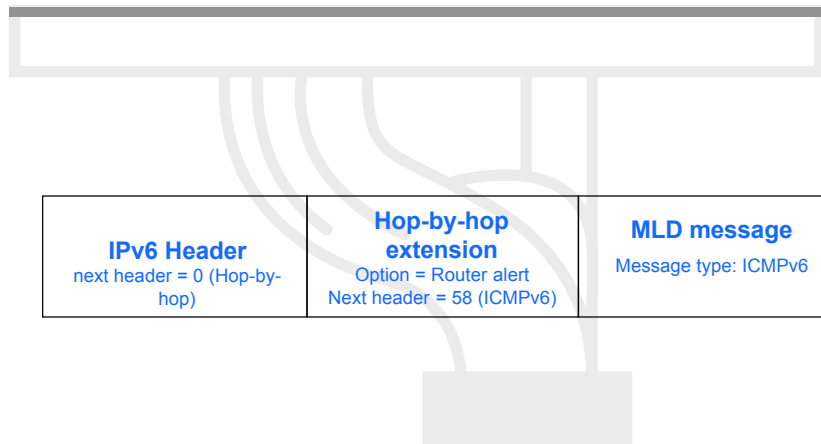

# MLDv1 message

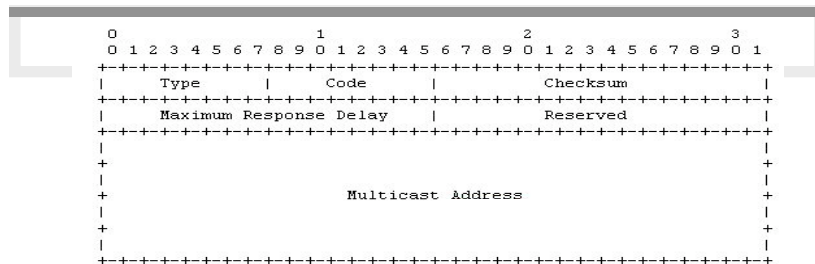


- **Type** : Messages types
  - General Query et Multicast-Address-Specific Query [130]
  - Multicast Listener Report [131]
  - Multicast Listener Done [132]
- **Code** : Set to 0 by sender and ignored then
- **Checksum** : for the complete packet (headers+MLD message)
- **Maximum Response Delay** : For query messages, time by which hosts must respond
- **Reserved** : Not used: set to 0 and ignored then
- **Multicast Address** : IPv6 multicast address or 0 according to the type of MLD message






## MLDv1 : Join a group

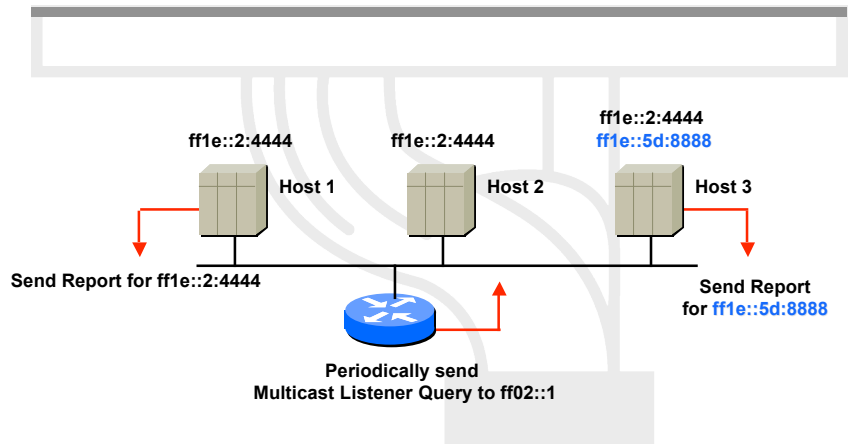

DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation


## MLDv1 : Leave a group

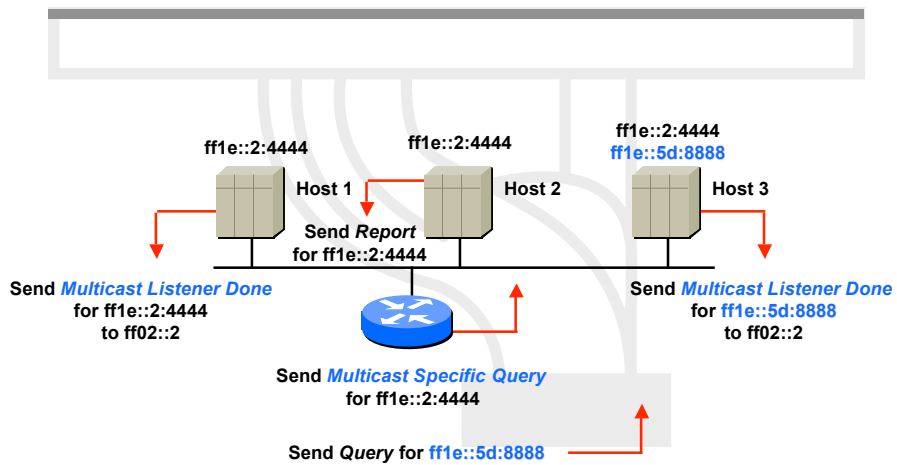

DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## MLDv1 : Leave a group

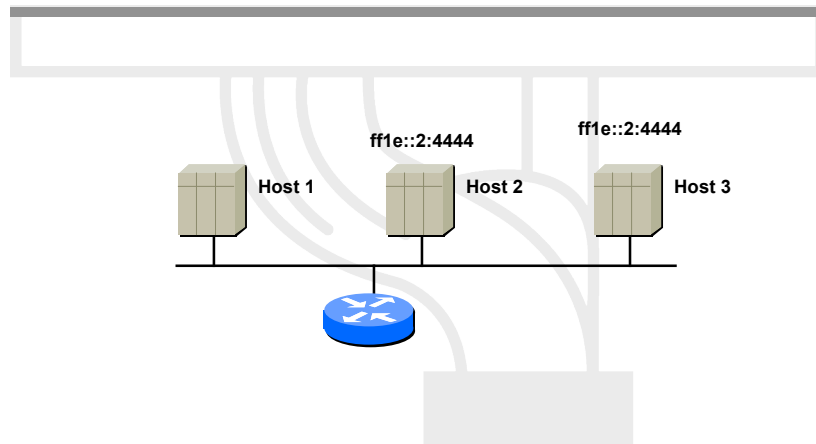

DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## MLDv2 (RFC 3810)

- Management of group **& sources**
  - INCLUDE : to receive packets from sources specified in the MLDv2 message
  - EXCLUDE : to receive packets from all sources except the ones specified in the MLDv2 message
- 2 types of messages
  - Multicast listener query messages
  - Multicast listener report messages
- Interoperable with MLDv1



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation



# IPv6 multicast

Multicast addressing

MLDv1 & MLDv2

**PIM SM/SSM**


Interdomain multicast



*DITCHE, Port Elizabeth, Sep. 2005*

IPv6DISSEmination and Exploitation

# PIM SM/SSM

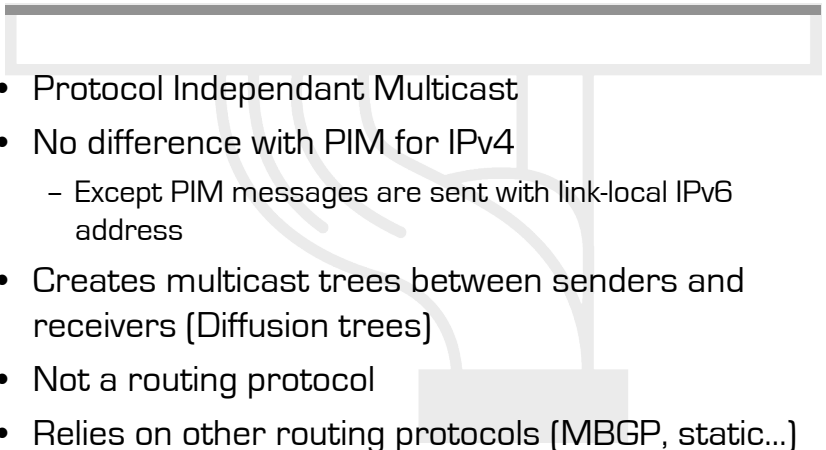- 
- Protocol Independent Multicast
  - No difference with PIM for IPv4
    - Except PIM messages are sent with link-local IPv6 address
  - Creates multicast trees between senders and receivers (Diffusion trees)
  - Not a routing protocol
  - Relies on other routing protocols (MBGP, static...)



*DITCHE, Port Elizabeth, Sep. 2005*

IPv6DISSEmination and Exploitation

# IPv6 multicast

Multicast addressing

MLDv1 & MLDv2

PIM SM/SSM

Interdomain multicast




DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## Interdomain multicast

- Not an SSM problem. Source specific trees created from senders to receivers accross domains
- ASM problem: was solved in the IPv4 world with MSDP (Multicast Source Discovery Protocol)

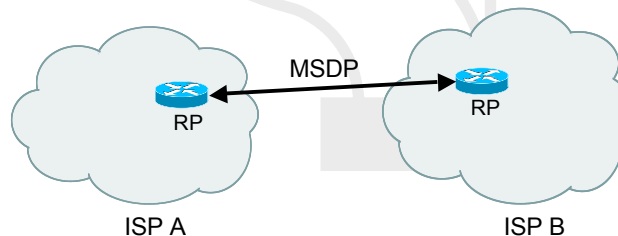

DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## Interdomain multicast

- No one wants MSDP for IPv6, not manageable/scalable
- SSM IETF lobby
  - Some SSM apps already developed
- How to solve N -> M multicast ?
  - Application / Middleware ?
  - Not there yet (work ongoing)
- Embedded-RP - RFC 3956
  - One unique PIM domain with shared RPs
  - Embedded is a solution for group-to-RP mapping
  - Requires support in all PIM routers



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

## Embedded-RP

- Flag : **ORPT**

11111111	flag	scop	res	rpad	Plen	Network prefix	Group ID
8 bits	4	4	4	4	8	64 bits	32 bits

Flag : **ORPT**

**R**=1 → Embedded-RP address

If **R**=1 → **P**=1 → **T**=1

**FF7x**::/16 addresses

Res : 0

**Rpad** : last 4 bits of the RP address

**Plen**: Prefix length

**Network prefix**

E.g. RP address **2001:660:3001:104::8**


Multicast address **FF7E:0820:2001:660:3001:104:1234:abcd**



DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation

# Embedded RP

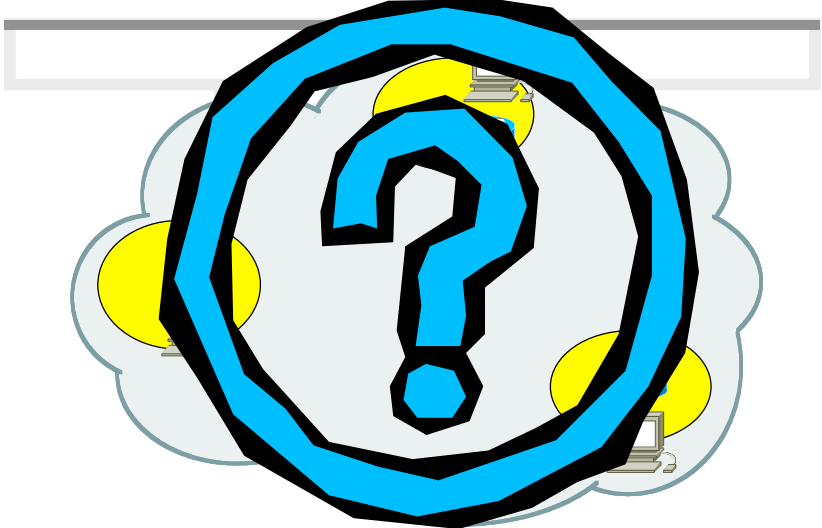

DITCHE, Port Elizabeth, Sep. 2005

IPv6DISSEmination and Exploitation